

SPECIFICATION



LOA	15.55 m	51'
Hull length	14.93 m	49'
LWL	13.54 m	44' 5"
Beam	4.75 m	15' 7"
Draft		
shallow keel	1.98 m	6' 6"
L-keel, medium	2.40 m	7' 10"

Displacement			
shallow keel	approx.	15.10 t	33,290 lbs
L-keel, medium		14.70 t	32,408 lbs


Engine Diesel			
standard	approx.	80.00 PS	80.00 hp

Fuel tank	approx.	280 l	74 gal
Fresh water	approx.	630 l	166 gal


CE Certificate	A - 12
Design	judel / vrolijk & co
Interior	HanseYachts Design

Mast length above WL	approx.	22.05 m	72' 4"
Total sail area	approx.	118.00 m ²	1,270 sq ft
Main sail			
standard	approx.	66.50 m ²	716 sq ft
furling	approx.	61.00 m ²	657 sq ft
Self-tacking jib	approx.	51.50 m ²	554 sq ft
Gennaker	approx.	200.00 m ²	2,153 sq ft
Reacher	approx.	87.00 m ²	936 sq ft


508

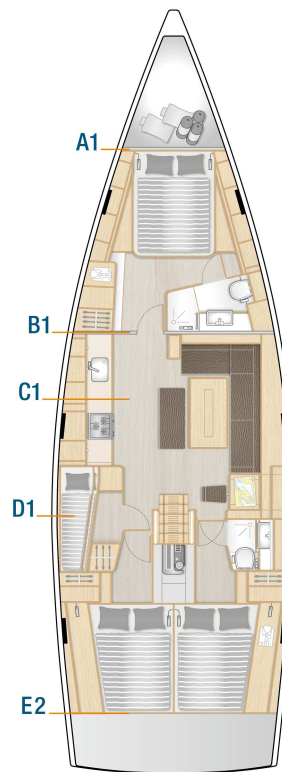


Standard

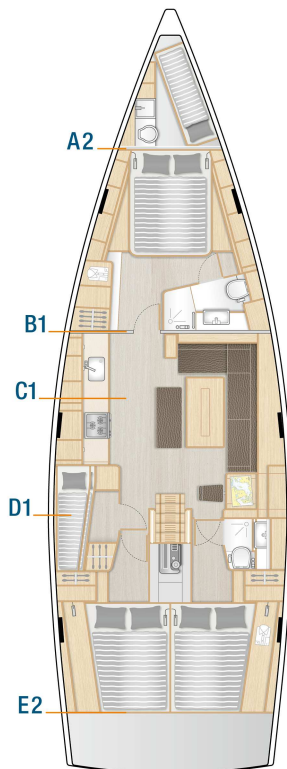

Option

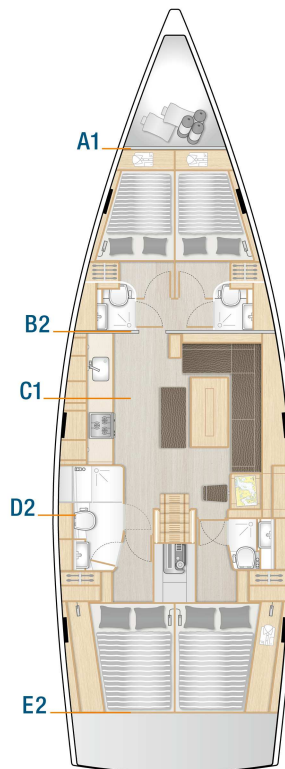

Option

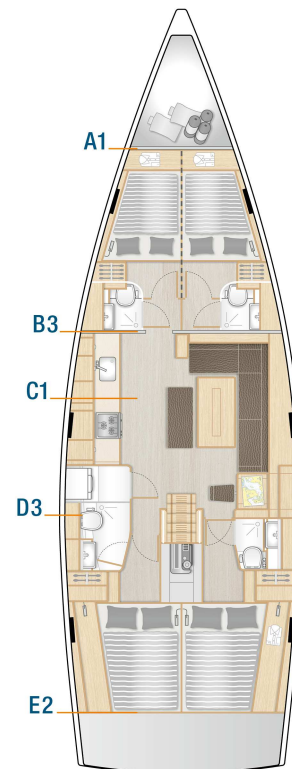

Option

HULL

- 6 hull windows (3 each side)
- GRP hull, isophthalic gelcoat, colour: Signal White (RAL9003), 1st layer vinyl ester resin and balsa sandwich laminat
- Waterline and cove line, isophthalic gelcoat, colour: Dark Grey (RAL 7043)

KEEL

- L-keel, cast iron, draft: 2.40 m
- GRP rudder with seawater resistant aluminium shaft and self-aligning bearings

LAYOUT & INTERIOR

- A1: Sail locker with extensive storage space
- B1: Master cabin with island double berth, storage space and a head with separate shower stall
- C1: Saloon with full functional galley on port and dining area on port and lounge area with chart table on stb
- D1: Cabin with double bunk bed on port with storage space
- E2: 2 aft cabins with double berth, storage space and separate head
- 3-burner gas stove with oven, waste bin, 12 V fridge approx. 130 l, double stainless steel sink with mixing tap
- Interior furniture in high quality marine plywood, satin varnish
- Hanse companionway closing system
- Saloon table, fixed
- Worktop in galley - Black Quartz

WOOD (FURNITURE, FLOORBOARD)

- Furniture - Mahogany Style, Satin Varnish
- Cupboards fronts in wood colour
- Floorboard - Acacia

UPHOLSTERY

- Mattresses for all berths
- Upholstery - Monte Carlo, colour: Cream

DECK & OUTSIDE EQUIPMENT

- GRP deck with antislip surface, isophthalic gelcoat, colour: Signal White (RAL 9003), 1st layer vinyl ester resin with balsa sandwich core. 1 cockpit locker on port and stb, stern locker port and stb, stowage for running rigging at helm position, anchor locker at bow.

- Teak on cockpit benches
- Teak on bathing platform
- Twin wheel steering system with emergency tiller
- 2 cockpit tables, stainless steel with teak tops
- Pulpit and pushpit, stainless steel
- Railing, incl. stanchions and stainless steel wire
- Covered halyards and control lines lead to cockpit helm position, organizers and jammers, 4 retractable mooring cleats, handrail on coach roof, bow anchor fitting with teak step
- 2 LEWMAR 55 ST EVO manual halyard winches
- Bathing platform, manual fold-out with swimming ladder
- Anchor and forestay fitting
- Self tacking jib system
- Mainsheet system
- 8 large and 4 small deck hatches - openable, anchor locker hatch, stowage on coach roof with acrylic glass hatch
- Fixed coach roof side windows
- 6 deck coach roof windows - acrylic glass with portlights next to companionway, portlights in cockpit side for aft cabins

RIG & SAILS

- Rig, anodized aluminium, deck stepped, with kicker, standing and running rigging and 2 reefs
- Manual jib furler
- ELVSTRÖM Dacron sails - full battened, main and jib

NAVIGATION & INSTRUMENTS

- Illuminated compass at each helm
- Navigation lights - LED

PROPULSION

- Fuel tank, approx. 280 l
- Engine (Diesel, approx. 80 hp) - saildrive, 2-blade fix propeller

EQUIPMENT

- 12 V and 230 V electric system with 230 V shore power and sockets in cabins and heads
- AGM battery set, capacity: 1x 90 Ah + 2x 160 Ah AGM
- Country Version: EU / AUS
- Battery charger 70 A
- Manual toilet with sea water flush - cabin layout B1

- Manual toilet with sea water flush - cabin layout E2 (only with XL5002)
- LPG gas system, stowage for 1 gas bottle
- Blackwater system (appr. 145 l) with deck extraction and seacock for head, electric and manual bilge pump
- Freshwater system with electric pump and 20 l hot water, heated also by main engine
- Fresh water tank, appr. 450 l

ACCESSORIES

- Mast steps

SHIPPING & TRANSPORT

- CE - Certificate cat. A - 12
- Owners manual
- EC - Type Examination Certificate